



**Write the original key
by infrared**

CG-MB



Please insert the new key into CG-MB device

CGDI-MB OAS 2 18 104

EIS

Read/Write Key

Compute Password

Generate EE

Auto Computer

ELV

Key Basic Information

SSID	00 00 00 00	Position	00
Available times	00	State	Activate Unused
Times used	00	Version	BE
Key password	Copy Paste	Track code	Copy

Interface:

Infrared

NEC Adapter

Read Key/Chip

Reset

Open/Write

Current hash

Save BE File


```

00000000 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000010 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000020 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000030 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000040 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000050 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000060 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000070 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000080 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000090 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00

```

Read success!

Click "read", show related key information

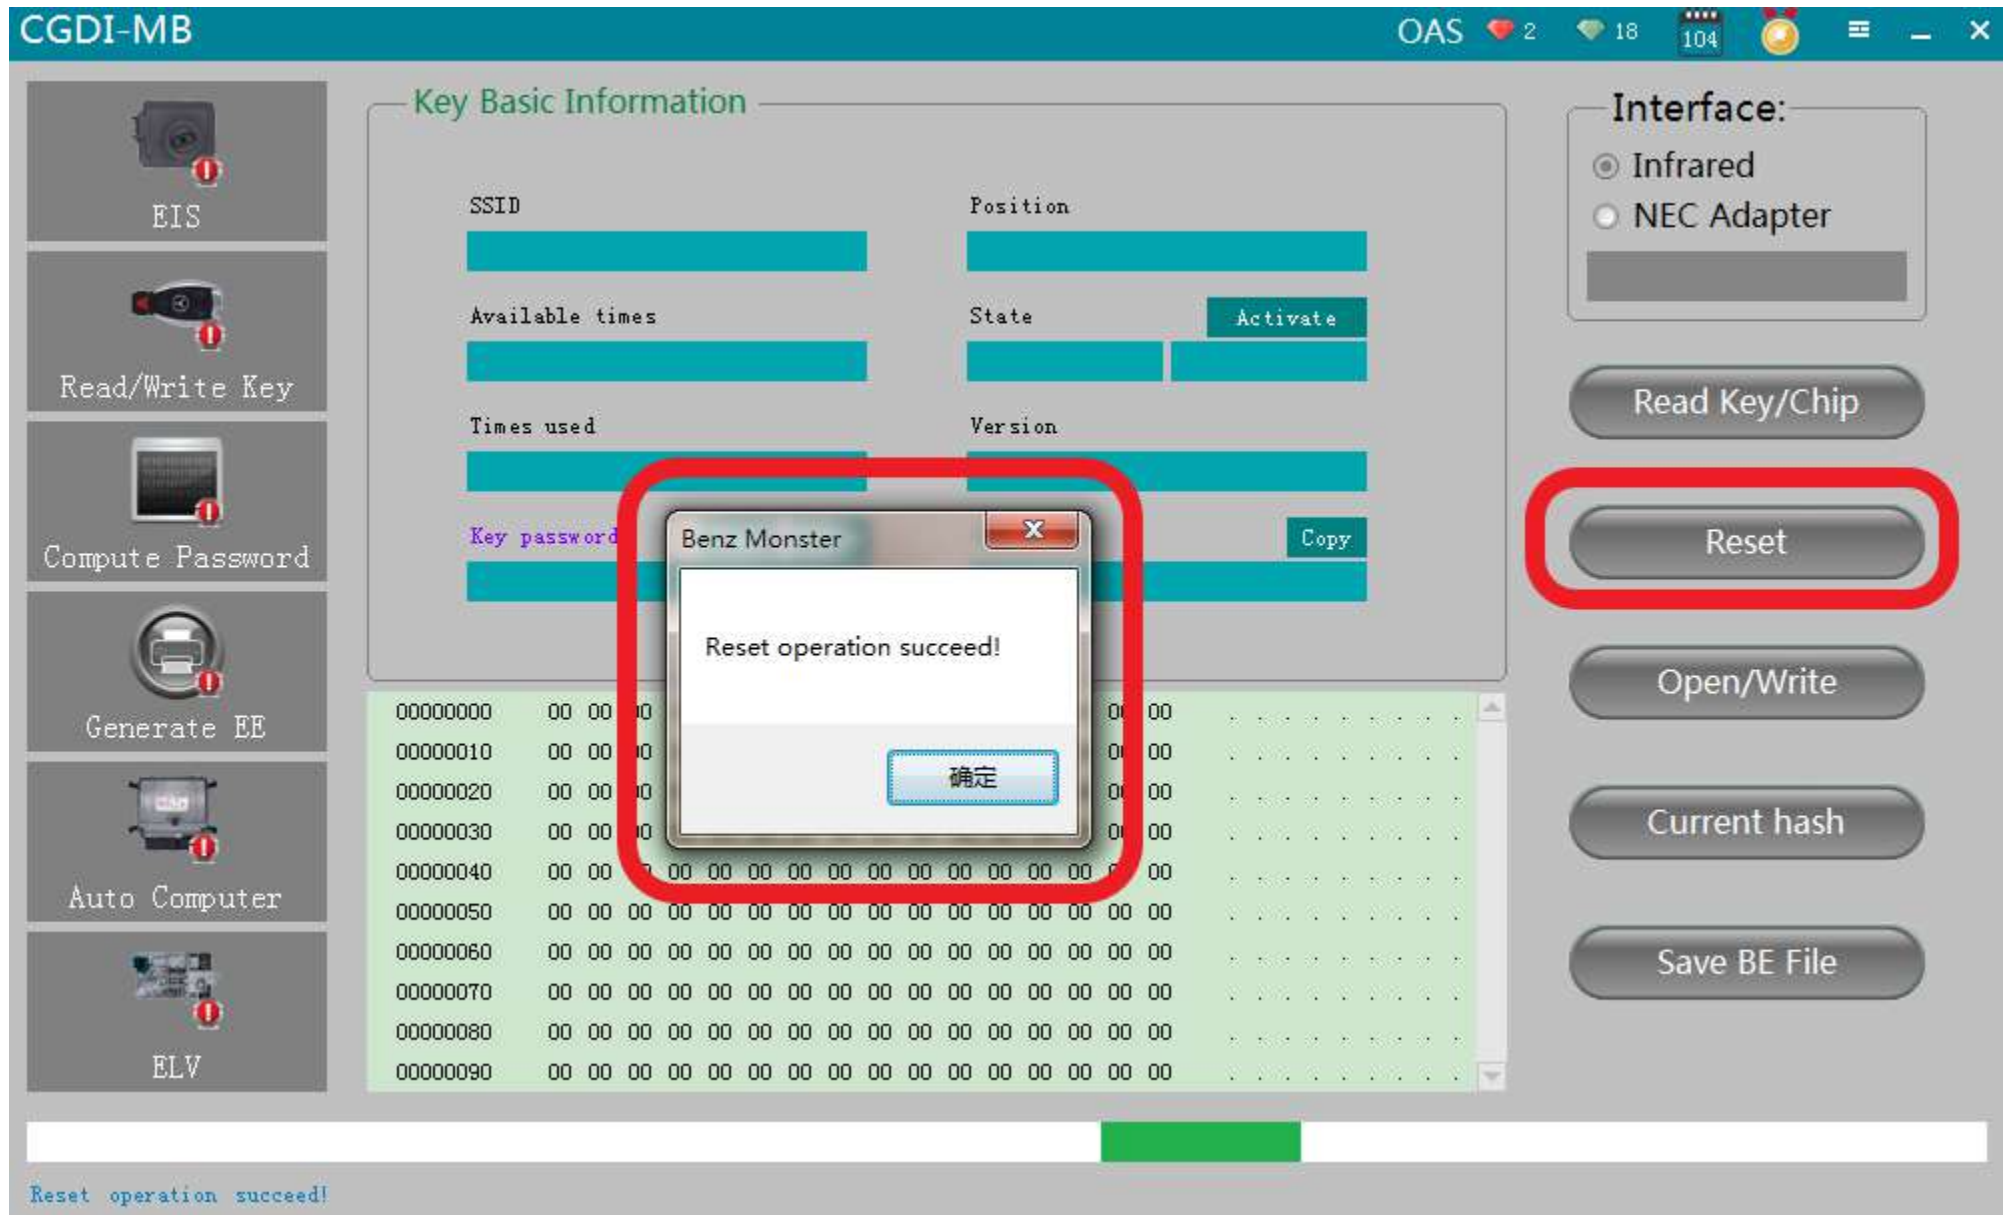

Click "reset", erase key

CGDI-MB OAS 2 18 104

Key Basic Information

SSID: [redacted] Position: [redacted]

Available times: [redacted] State: [redacted] **Activate**

Please Note

Smart key please choose 41 format, common key and BE key please choose 51 format!

When writing the original key, please make sure that it is wiped by the CGMB, otherwise the write will fail!

OK

00000000
00000010
00000020
00000030
00000040 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000050 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000060 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000070 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000080 00 00 00 00 00 00 00 00 00 00 00 00 00 00
00000090 00 00 00 00 00 00 00 00 00 00 00 00 00 00

Interface:

Infrared
 NEC Adapter

Read Key/Chip

Reset


Open/Write

Current hash

Save BE File

Reset operation succeed!

Click "open/write", and note the prompt

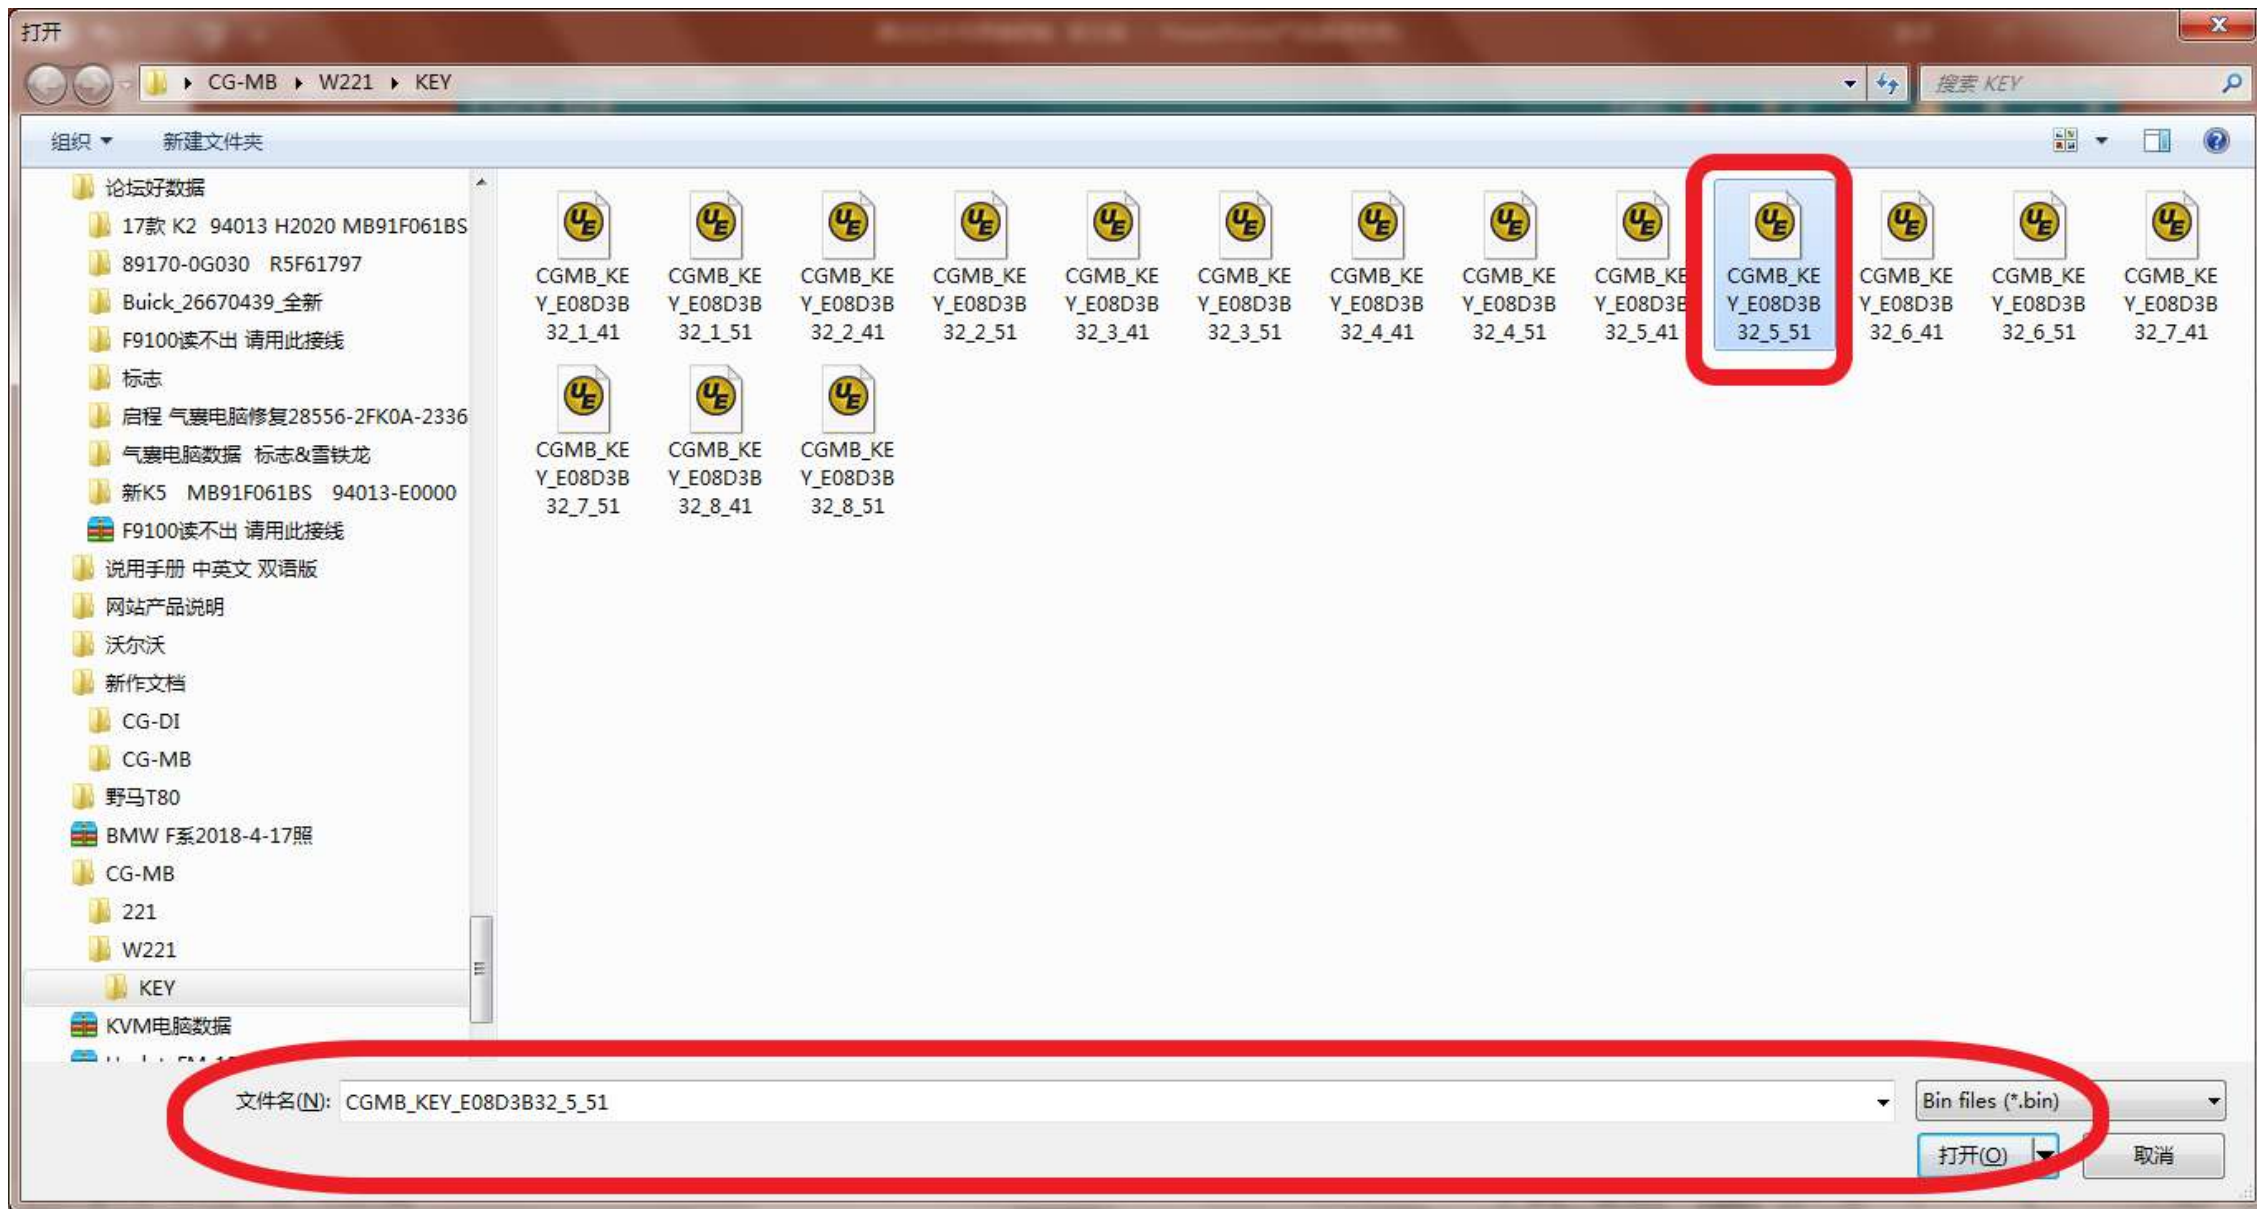

Choose—unused key position data, click and open it

CGDI-MB OAS 2 18 104

Key Basic Information

SSID	Position
Available times	State Activate
Times used	Version
Key password	Copy

Interface:

- Infrared
- NEC Adapter

Read Key/Chip

Reset

Open/Write

Current hash

Save BE File

Benz Monster

Write success!

确定

```
00000000 01 15 32 01 2 56 . . . B U . . .
00000010 16 D9 3C C1 F CF . . 1 . . m h .
00000020 7E 3E 02 1 7 5F ~ > . . . H .
00000030 59 1A 50 C1 5 B 2F Y . P . . .
00000040 3E 77 25 28 11 5A 78 30 18 1E 51 52 53 8 EC > w % ( . . v . .
00000050 F0 48 1E 15 72 8E 7E ED 2E 47 86 4E 7C L FE . H . . . r . .
00000060 75 F2 D8 11 C4 B9 2B 78 9E 7F FF FF FF FF FF FF u . . . . + x .
00000070 FF FF FF D6 A1 7F 44 D2 1B 13 12 7F FF 00 00 02 . . . . . D . .
00000080 FF FF FF FF FF FF FF 7C 90 55 89 E4 8D 3B 32 . . . . . | . .
00000090 01 01 01 01 FF FF FF FF 73 0C FF FF FF FF 04 FC . . . . . s . .
```

Write success!

Write success



Get on car to learn it